



INSTALLING THE WAVE SHADE

1. Measure between the clips to determine the wire spacing.

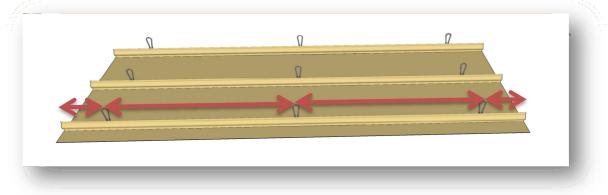

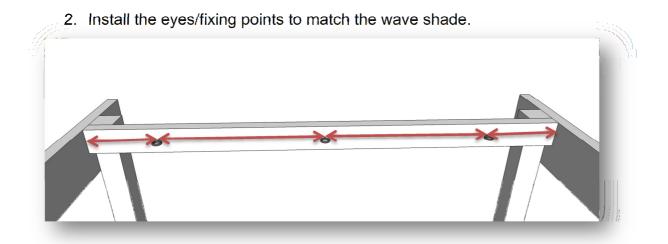

3. Install the runner wires.

4. Clip the wave shade onto the wires.

(Note: clip the stationary end of the shade onto the eye to hold the sail in position)



5. Install the cleat to tie the pull rope to when the sail is extended. (unless the option to use pulleys to retract/extended the sail is chosen)